


Features

- **FloorScore®** certified - no traces of VOCs, phthalate-free, no formaldehyde off-gassing, and are 100% recyclable
- Defined bevel reduces minor issues with flatness of the subfloor and add to a more realistic appearance

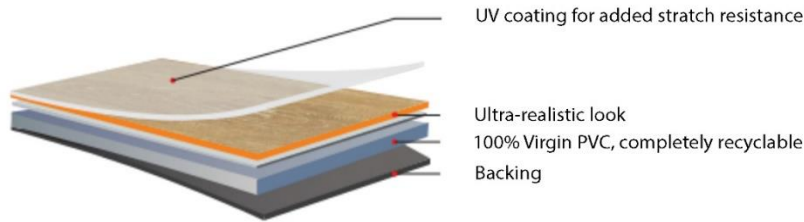

Product Information

Product Line	High Performance Luxury Vinyl Flooring
Construction	Dryback vinyl
Dimension	2.0mm x 187mm x 1227mm
Wear Layer Thickness	0.3mm (12 mil)
Finish	2-pass UV cured Urethane Finish
Installation	Glue Down
Warranty	30 Year Residential and 12 Year Commercial Warranty when installed with Twelve Oaks specified adhesive.

Testing

Classification	Method	Result
Class	ASTM F1700	Class III, Type B - Embossed
Slip Resistance	ASTM C1028-07	Dry: 0.80; Wet: 0.71
Static Load	ASTM F970	Applied Load: 1000 psi, Residual Indentation: 0.04mm
Dimensional Stability	ASTM F2199	Pass: ≤0.02 in. per linear foot
Resistant to Chemicals	ASTM F925	Pass: Not affected
Abrasion	ASTM D4060	Test Revolutions: 1000, 0.004% mass loss
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens
Reaction to Fire	EN13501-1	Class B fl-s1
Critical Radiant Flux	ASTM E648	Pass, >0.45 watts/cm ²
Concentration of Dibutyl Phthalate	ISO 16000	<1 µg/m ³ after 28 days
Concentration of Diethylhexyl Phthalate	ISO 16000	<1 µg/m ³ after 28 days
Flexibility	EN435	No Damage

Packaging Information

	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per Carton	Weight (lb. per carton)
Plank	1227	187	2		
Carton	1232	190	35	37.2	28

Pallet Information

	Length (mm)	Width (mm)	Height (mm)	Volume (m ³)	# of carton per Pallet	Sq. ft. /pallet	Weight (lb.)
Pallet	1245	991	670	0.83	75	2790	2100