


Product properties

Format		2200* x 185 x 13 mm
Top layer		~ 3.6 mm
Packaging	Pack	9 Elements / 3.663 m ² / 29.304 kg
	Pallet	32 Packs / 117.216 m ² / 937.728 kg
Guarantee (according to Parador guarantee conditions)		25 years (private use) 10 years (commercial use)
Notes		*1 joint length permitted per package - cleaning and maintenance see instructions - technical changes reserved

Product labelling

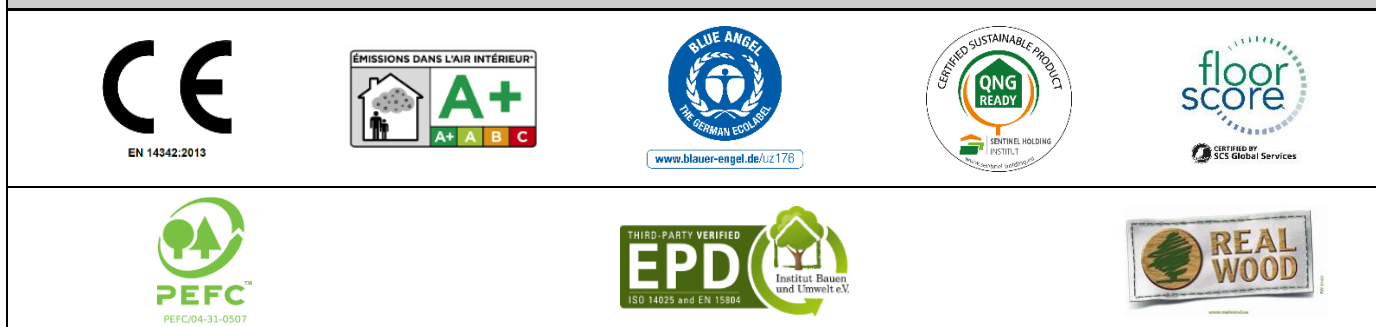

Tolerances (EN 13489)

Admissible difference in length (± 0.1 %)	± 0.05 %
Admissible difference in width (± 0.2 mm)	± 0.1 mm
Squareness of the element (≤ 0.2 %)	≤ 0.05 %
Longitudinal curvature along the element (≤ 0.1 %)	≤ 0.05 %
Transverse curvature across the width (≤ 0.2 %)	≤ 0.08 %
Height differences of elements (≤ 0.2 mm)	≤ 0.18 mm
Moisture content at the time of first delivery (5-9%)	6 – 8 %

Classification general product features

	Test method	Rating
Resistance to roller castor chairs	EN 425	We recommend the use of a conventional chairmat
Effect of a furniture leg	EN 424	No visible changes
Thermal resistance Suitable for installation over underfloor heating when using an appropriate underlay and moisture barrier.	EN ISO 10456	0.087 m ² *K/W
E1 HCHO	EN 16516	≤ 0.05 ppm
Acoustical - Impact noise reduction	ISO 717-2	18 dB (with Akustik-Protect 100)
Disposal		EAK-Code-number 20 01 38

Classification surface characteristics

	Test method	Rating
Slip resistance	EN 16165, Annex C pendulum test	PTV (dry (slider 55)) ≥ 36 Low slip potential according to UK Slip resistance group
Reaction to fire	click-installation as a floating floor	EN 13501-1 D _{fl} s1
	installation by all-over adhesion	EN 13501-1 D _{fl} s1
Chemical resistance	EN 13442:2023 Annex B	Category 5

Free sorting according to EN 13489

Assortment:	Wide plank	
Characteristics according to EN 1310:	Upper side of the floor board	
Type of wood:	Oak	
Botanical designation / Code (EN 13556):	Quercus petraea Liebl., Quercus robur L. / QCXE	
Shortcut / grade (internal):	GÜ_LHD-EI	
	Version 5 2023	
Grade:	Rustikal	Character
Sound sapwood	not permitted	
Knot (intergrown)	permitted: up to 80 mm	permitted no limitation
Falling out knot	permitted: up to 60 mm	permitted: up to 80 mm
Pinknots	permitted and as well cluster of knots	
Filling	permitted	
Slight cracks / hairline cracks	permitted	
Bark pocket	permitted	
Lightning cracks	permitted in knots	
Slope of grain	no criterion	
Healthy heart	permitted	
Discoloration, colour variation	permitted: all colours	permitted: all colours / Inlets in all colors and dimensons
White streaks	permitted	
Pilling sticks marking	not permitted	
Biodeterioration (EN 1311)	not permitted	
Non-visible parts		
All features without restrictions to size or quantity permitted, provided they do not affect the strength or durability of the floor.		
Comment		
Maximum 3% of planks are allowed in the next lower grading. Wood is a natural product and therefore different in colour and texture. Samples, brochures and photos are therefore only approximate and not binding. The action of sunlight affects the natural variation in wood shade. This allows the product present at the time of delivery of significant differences to master.		