


### Features

- All of the 7" x 60" products are equipped with Registered Embossing technology
- 100% Waterproof | 20 mil wear layer
- FloorScore certified - no traces of VOCs, phthalate-free, no formaldehyde off-gassing, and are 100% recyclable.
- Patented Välinge® 5G Joint is strongest on the market, and proven to effectively reduce the chances of gapping
- Painted bevels add to a more realistic appearance. Made to closely resemble grout line on tiles
- Built-in antimicrobial cork underlayment has superior sound absorption and thermal insulation properties
- Wear layer is enhanced with Armor Care technology, making it exceptionally stain and scratch resistant

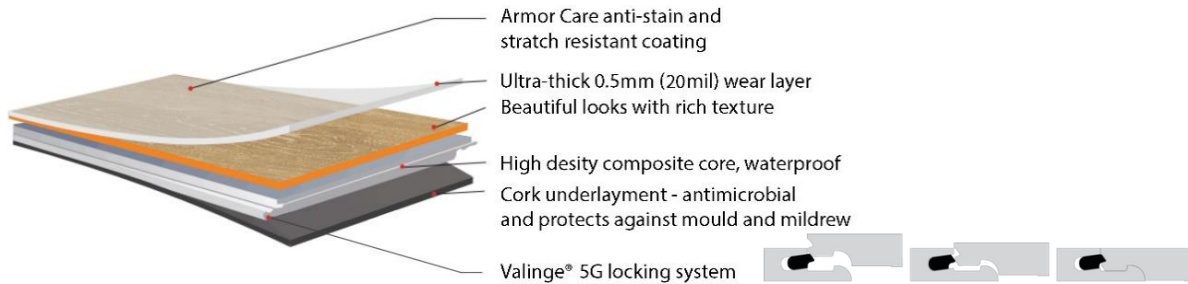

### Product Information

<b>Product Line</b>	SureWood Pro Luxury Vinyl Flooring
<b>Construction</b>	WPC (wood polymer composite) vinyl
<b>Dimension</b>	Plank: 8mm (T) x 180mm (W) x 1522mm (L)   Tile: 8mm (T) x 457mm (W) x 930mm (L)
<b>Underlayment</b>	1.5mm antimicrobial cork underlayment
<b>Wear Layer Thickness</b>	0.5mm (20 mil)
<b>Finish</b>	2-pass UV cured Urethane Finish
<b>Installation</b>	Floating installation by clicking the end joints together. Please refer to Installation Instruction
<b>Warranty</b>	30-Year Residential and 12-Year Commercial Warranty

### Testing

Classification	Method	Result
Class	ASTM F1700	Class III, Type B - Embossed
Slip Resistance	ASTM C1028-07	Dry: 0.80; Wet: 0.71
Static Load	ASTM F970	Applied Load: 1000 psi, Residual Indentation: 0.04mm
ΔIIC	ASTM E2179-03	23
IIC	ASTM E492-09	72
STC	ASTM E90-09	71
Dimensional Stability	ASTM F2199	Pass: ≤0.02 in. per linear foot
Resistant to Chemicals	ASTM F925	Pass: Not affected
Abrasion	ASTM D4060	Test Revolutions: 1000, 0.004% mass loss
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens
Reaction to Fire	EN13501-1	Class B fl-s1
Critical Radiant Flux	ASTM E648	Pass, >0.45 watts/cm <sup>2</sup>
Concentration of Dibutyl Phthalate	ISO 16000	<1 µg/m <sup>3</sup> after 28 days
Concentration of Diethylhexyl Phthalate	ISO 16000	<1 µg/m <sup>3</sup> after 28 days
Flexibility	EN435	No Damage

**Packaging Information**

	<b>Length</b> (mm)	<b>Width</b> (mm)	<b>Thickness</b> (mm)	<b>Sq. ft.</b> per Carton	<b>Weight</b> (lb. per carton)
<b>Plank Size</b>	1522	180	8		
<b>Plank Carton</b>	1537	192	69	23.6	40
<b>Tile Size</b>	930	457	8		
<b>Tile Carton</b>	945	470	53	27.5	46

**Pallet Information**

	<b>Length</b> (mm)	<b>Width</b> (mm)	<b>Height</b> (mm)	<b>Volume</b> (m <sup>3</sup> )	<b># of carton</b> per Pallet	<b>Sq. ft.</b> /pallet	<b>Weight</b> (lb.)
<b>Plank Pallet</b>	1540	920	859	1.22	55	1298	2200
<b>Tile Pallet</b>	960	1410	1001	1.35	51	1402.5	2346