

Tarkett VCT II

VINYL COMPOSITION TILE

style & strength where
they're needed most



 **Tarkett**

Trusted solutions for demanding spaces.

Tarkett VCT II brings great design options and outstanding value together in a long-trusted solution. This durable material is made to withstand heavy traffic and rolling loads, delivering strong performance and return on investment. Design is never lacking either, with a carefully selected palette of favorite neutrals and colorful accents that can be mixed and matched in creative layouts. Tarkett's vinyl composition tile is constructed of up to 85% limestone and can be completely recycled into new VCT flooring when it's time for an update. Tarkett VCT II is ortho-phthalate-free to contribute to better indoor air quality. A complete solution from every angle.



MILITARY TAN 527 | SKY VISTA 568
DESERT STORM 573 | MEADOW 588 | DEEP WATER 598



COPPER 504 | SANDSTONE 556
EARTH 571 | DESERT STORM 573



DEEP PLUM 513 | SHOOTING STAR 557



STARRY NIGHT 323 | SKY VISTA 568
BLUE DROP 579 | DEEP WATER 598



556 Sandstone W
TG1 Snowbound W *



326 Dunes CB
121 Cement CB *



530 Winter Storm WG
24 Grey Haze WG *



573 Desert Storm CB
22 Pearl CB *



527 Military Tan WB
280 Shoreline *



593 Mushroom CB
80 Fawn CB *



533 True Beige WB
11 Canvas WB *



325 Ginger Spice WB
107 Neutrality



582 Ivory Tower CB
31 Zephyr CB *



501 Almond WB
09 Clay WB *




329 Pebble Beach CB
121 Cement CB *



503 Adobe
76 Cinnamon *



323 Starry Night CG
31 Zephyr CB *




580 Mineral White W
08 Icicle W *




509 Pewter WG
32 Pebble WG *



597 Amberlight WB
TA3 Castaway CB



571 Earth WB
129 Silk WB *




504 Copper
45 Sandalwood WB *



480 Pure White W
460 Cotton W *




557 Shooting Star CG
TA5 Colonial Grey CG *



522 Steel Works W
TA6 Bedrock CG *




569 Ebony B
40 Black B *



528 Doeskin Brown
76 Cinnamon *



513 Deep Plum
VM2 Shoreline Plum *



575 Seafoam W
50 White W*



594 Turquoise
VM5 Dream Teal*



500 Buttermilk
79 Bone White W*

GRANITE SLIP RESISTANT




880 Twilight CG
TB3 Dover CG*



873 Daylight CB
32 Pebble WG*




875 Sunlight WG
55 Silver Grey WG*



328 Palm CB
31 Zephyr CB




588 Meadow
41 Seabreeze




526 Green Grape
TH1 Glenhaven


PREMIUM QUARTZ




600 Stone White W
50 White W*



601 Stone Taupe CB
24 Grey Haze WG*

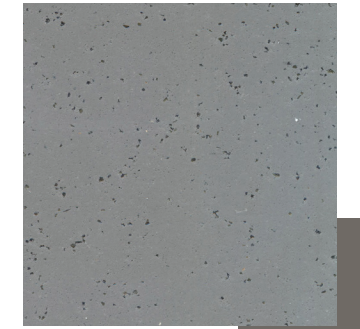


602 Stone Grey WG
48 Grey WG*



579 Blue Drop W
08 Icicle W*




572 Cloudy CG
262 Drizzle CG*



524 Dark Forest
86 Hunter Green

SOLID COLORS




60 Solid White W
50 White W*




65 Solid Red
TB6 Flame



69 Solid Black B
40 Black B*




568 Sky Vista
84 Blue Jeans



598 Deep Water
84 Blue Jeans



565 Matador
TB6 Flame

 suggested coordinating finishing borders (wall base)

We've identified Color Foundations™ neutrals in the following way:

WB (Warm Beige), **CB** (Cool Beige), **WG** (Warm Grey), **CG** (Cool Grey), **B** (Black), **W** (White).

*Suggested colors for finishing borders (wall base). Coordinated Tarkett Accessories are a printed approximation. Please refer to the Color Guide for accurate color representation.





For years, Tarkett has raised the sustainability standards of our industry. We took the first steps and are determined to stay a step ahead.


And while inspirational words are great, we know impact is in the numbers – numbers subjected to intense third-party scrutiny. So, at Tarkett we don't just say it, **we prove it.**

Sustainability Highlights

Feel confident in the numbers

 A holistic approach you can count on...

 ...And certifications you can trust.

 We're leaders in radical transparency.

 Setting tomorrow's standards...

 ...For globally recognized excellence.

95%

of our raw materials are third-party assessed for their impact on human and environmental health based on Cradle to Cradle criteria.

70%

of raw materials are abundant, rapidly renewable or recycled.

14

zero-waste to landfill manufacturing plants.

2011

started working with EPEA to integrate Cradle to Cradle principles into every facet of our business.

2013

first commercial flooring CERTIFIED **asthma and allergy friendly**®.

2022

Powerbond RS is the first soft surface product in the industry to be CERTIFIED **asthma and allergy friendly**®.

100_{ppm}

raw materials content revealed down to 100 parts per million.

When most manufacturers reveal raw materials content down to just 1,000 ppm, there's simply no contest.

We've been providing Material Health Statements since 2013 to give you peace of mind about the content of our products.

99%

of flooring solutions have low VOC emission levels – 10x lower than the most stringent world standards.

100%

ortho-phthalate-free vinyl production. First company to eliminate ortho-phthalates from all products.

2010

first flooring manufacturer to join the UN Global Compact.

2021

awarded the Gold medal by EcoVadis; now ranked among the top 2% of companies in our industry rated by EcoVadis.

2022

scored A-, the CDP management level, regarding the climate change performance assessment.

TARKETT VCT II

TECHNICAL DATA	STANDARDS	VCT	PREMIUM QUARTZ	PREMIUM SOLIDS*
Type of Floor Covering		Vinyl Composition Tile	Vinyl Composition Tile	Vinyl Composition Tile
Classification	ASTM F1066	Class 2 Through Pattern	Class 2 Through Pattern	Class 1 Solid Color
Colors		39	3	3
Total Thickness	ASTM F386	.125" (3.18 mm)	.125" (3.18 mm)	.125" (3.18 mm)
Static Load Limit	ASTM F970	250 psi	250 psi	250 psi
Flammability	ASTM E648	Class 1 (> 0.45 W/cm ²)	Class 1 (> 0.45 W/cm ²)	Class 1 (> 0.45 W/cm ²)
Smoke Density	ASTM E662	< 450	< 450	< 450
Slip Resistance	ASTM D2047	≥ 0.5 SCOF	≥ 0.5 SCOF	≥ 0.5 SCOF
Chemical Resistance	ASTM F925	Pass	Pass	Pass
Tile Size		12" x 12" (305 mm x 305 mm)	12" x 12" (305 mm x 305 mm)	12" x 12" (305 mm x 305 mm)
Size/Squareness	ASTM F2055	Pass	Pass	Pass
Deflections	ASTM F1304	Pass	Pass	Pass
Impact Resistance	ASTM F1265	Pass	Pass	Pass
Dimensional Stability	ASTM F2199	Pass	Pass	Pass
Residual Indentation	ASTM F1914	Conforms	Conforms	Conforms
CAN/ULC S102.2		FSR 0 / SDC 20	FSR 0 / SDC 20	FSR 0 / SDC 20
Weight/sq. ft./m ²		1.4 lbs sq. ft. (6.9 kg / m ²)	1.4 lbs sq. ft. (6.9 kg / m ²)	1.4 lbs sq. ft. (6.9 kg / m ²)
Carton Quantity		45 tiles = 45 sq. ft. (4.18 m ²)	45 tiles = 45 sq. ft. (4.18 m ²)	45 tiles = 45 sq. ft. (4.18 m ²)
Carton Weight		63 lbs (29.0 kg)	63 lbs (29.0 kg)	63 lbs (29.0 kg)
Warranty		5 Year LIMITED Warranty. See www.tarkett.com for complete warranty information.	5 Year LIMITED Warranty. See www.tarkett.com for complete warranty information.	5 Year LIMITED Warranty. See www.tarkett.com for complete warranty information.
Maintenance		Conventional VCT Maintenance 3-5+ coats of finish**	Conventional VCT Maintenance 3-5+ coats of finish**	Conventional VCT Maintenance 3-5+ coats of finish**

*Premium Solids are only recommended for accents and borders.

**Depending upon use of the floor

Please visit www.tarkett.com for the most updated specifications, and installation, cleaning and maintenance instructions.

ON THE COVER:

TARKETT VCT II 503 ADOBE | 528 DOESKIN BROWN | 597 AMBERLIGHT



Tarkett North America

30000 Aurora Road
Solon, Ohio 44139
800.899.8916

tarkett.com

Tarkett North America

30000 Aurora Road
Solon, Ohio 44139
800.899.8916

tarkett.com