

# Woodura Planks 3.0

## EKET 3.0 XXL



Type of wood  
Oak



Grading  
Nature



Surface finishing  
Brushed lacquer



Staining  
Natural




Pattern  
Plank



Water resistance  
High

Eket is an age-less Swedish-designed hardened wood floor in a brushed lacquer. This authentic-looking wood floor in a Natural shade has been paired with the Nature grading, providing a classic wood feel. Made from FSC-certified European oak, the brushed lacquer surface provides a natural wood feel – similar to oiled floors – but the lacquer makes the floors easier to clean and maintain. We recommend brushed lacquered surfaces in all areas of the home.

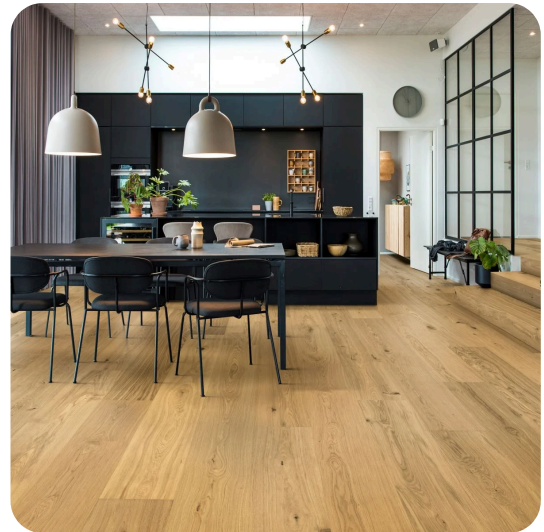

## Specification

### GENERAL

|                   |                         |
|-------------------|-------------------------|
| Type of floor     | <b>Hardened wood</b>    |
| Type of wood      | <b>Oak</b>              |
| Grading           | <b>Nature</b>           |
| Surface finishing | <b>Brushed lacquer</b>  |
| Staining          | <b>Natural</b>          |
| Light/dark        | <b>Medium dark</b>      |
| Pattern           | <b>Plank</b>            |
| Locking system    | <b>Välinge 5G® Dry™</b> |
| Core              | <b>HDF</b>              |
| Microbevel        | <b>4 sided</b>          |

### DIMENSIONS

|                         |                |
|-------------------------|----------------|
| Format                  | <b>XXL</b>     |
| Width                   | <b>271 mm</b>  |
| Length                  | <b>2378 mm</b> |
| Thickness               | <b>11,3 mm</b> |
| Thickness of wear layer | <b>0,6 mm</b>  |

### PACKAGE

|                           |                         |
|---------------------------|-------------------------|
| Quantity in box           | <b>3 pcs</b>            |
| m <sup>2</sup> / box      | <b>1,93</b>             |
| m <sup>2</sup> per pallet | <b>93 m<sup>2</sup></b> |
| Weight per m <sup>2</sup> | <b>11 kg</b>            |
| Weight per box            | <b>22 kg</b>            |

### CLASSIFICATION AND SAFETY

|                                       |   |
|---------------------------------------|---|
| Supports Underfloor Heating           | <b>Yes</b>                                |
| Water resistance                      | <b>High</b>                               |
| Fire Resistance (EN 13501)            | <b>Cfl-s1</b>                             |
| Thermal conductivity (EN 12664)       | <b>0,16 W/(m*K)</b>                       |
| Thermal resistance (EN 12667)         | <b>0.07 m<sup>2</sup>K/W</b>              |
| Formaldehyde emission (EN 717-1)      | <b>E1&lt;=0.124 mg/m3</b>                 |
| Brinell hardness (EN 1534)            | <b>8 HB (average value)</b>               |
| Impact resistance (EN 14354)          | <b>EC3</b>                                |
| Thickness swelling (EN 14354)         | <b>&lt;10% (5% typical)</b>               |
| Wear resistance (EN 14354)            | <b>&gt; 1000 cycles</b>                   |
| FSC                                   | <b>FSC Mix</b>                            |
| SundaHus                              | <b>Evaluated by SundaHus</b>              |
| Svanen                                | <b>Yes (3029 0021)</b>                    |
| Greenguard Gold                       | <b>Greenguard Gold Certified</b>          |
| A+                                    | <b>Yes</b>                                |
| M1                                    | <b>Yes</b>                                |
| CE Marked                             | <b>Yes</b>                                |
| Limited warranty (public environment) | <b>10 years</b>                           |
| Limited warranty (home environment)   | <b>Limited Lifetime Warranty</b>          |
| Level of use domestic (EN ISO 10874)  | <b>Class heavy Residential (Class 22)</b> |



woodura®

**Bjelin Sweden AB** | [bjelin.com](http://bjelin.com) | [support@bjelin.se](mailto:support@bjelin.se) | +46-771-101099

Copyright 2024 Bjelin Sweden AB. Weights and dimensions may have minor variations depending on external circumstances. Bjelin reserves the right to deviate from the weight and dimensions in this technical data sheet. Technologies mentioned may be subject to patent protection and invented by Välinge Innovation AB ([www.valinge.se/patents](http://www.valinge.se/patents)). Use of trademarks herein owned by Bjelin Sweden AB or Välinge Innovation AB is under license.



For installation and caring instructions, and further product information, scan the QR code or visit [bjelin.com](http://bjelin.com).